

THE STRAIGHT WHEELS®



Easy to Attach...Easy to Remove

The Straight Wheels: DIRECTIONS

Thank you for your purchase of The Straight Wheels, The ultimate product to turn your table into a rolling table.

The Straight Wheels are designed to attach to most white resin folding tables (rectangular or round shape). Please refer to the bullet below to ensure a safe and secure fit.

- If the table leg does not fit easily in the leg-cup do not force or try to make it fit.
- You can leave the rubber stopper - which is on the bottom of the table leg on or off.
- If you leave the rubber table leg cap on it will raise the table 5 inches, if you take the rubber leg cap off it will raise the table 4 inches.
- Make sure the table leg can be fully inserted into the leg-cup so that the leg is sitting at the bottom of the cup. (It must sit in the bottom of the cup to achieve the necessary support for stability).
- There should be some space between the leg and the wall of the leg-cup.

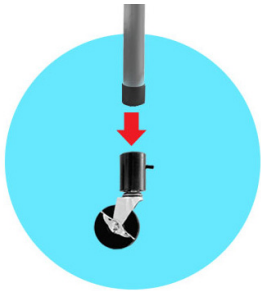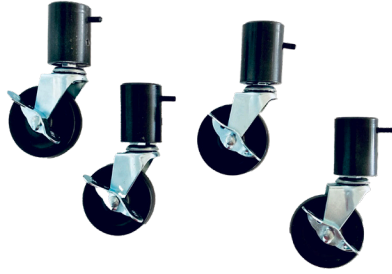

Simple to Attach

It is recommended that the table be turned over completely so that it is upside down and stable. Do this on a stable, flat surface.

Place the leg fully into the Straight wheel leg-cup wheel.

Face the wheel inward as this will ensure that the wheels do not "Stick-out" from the table causing a safety hazard. In addition, with the wheels facing inward, most tables can be folded as they ordinarily are.

However, some brands of tables may not fold properly and the wheels will have to be removed in order for the table to fold as designed by the manufacturer.

Finger tighten the Screw in the side of the leg-cup.

Using the Allen Key included with the wheels (and after finger tightening, turn the screw 1/2 to 1 full turn to secure the wheel assembly to the table leg the screw secures the wheel assembly to the leg.

Do not over-tighten the screw as this may strip the threads in the wheel assembly.

Tighten until the screw encounters moderate resistance and no further.



Safety Data

Straight Wheels utilize heavy duty components, which are designed to meet the application in which they are intended.

- Each wheel assembly is rated at 250 pounds.
- HOWEVER, WE WOULD NEVER RECOMMEND OR ENDORSE PLACING WEIGHT ON ANY TABLE WHICH EXCEEDS THE TABLE MANUFACTURERS LOAD CAPACITY FOR WHICH THAT TABLE IS RATED.
- EXCEEDING THE TABLE MANUFACTURERS RECOMMENDED CAPACITY COULD RESULT IN SERIOUS BODILY HARM AND INJURY.
- Make sure before each use, that the Straight Wheels are secure fastened to the table leg. Check to see that the securing Allen screw are appropriately tightened.
- Straight Wheels are intended for use with folding wooden and plastic tables. Any use other than with these types of tables is not recommended nor has the product been tested.
- Improper use is solely at the user's risk and there are no warranties or representations made for uses other than Straight Wheels intended use.
- Tables should be used on stable secure surfaces only.
- Wheels assemblies should be locked when loading/unloading/using the tables.
- The only times the wheels should be unlocked is when rolling the tables between locations.
- Adequate care and precautions should be used when rolling the table between locations to ensure personnel safety, especially when tables have items on top.
- The user assumes full risk and responsibility for the use and application of the Straight Wheels, which includes holding the manufacturer harmless for any accidents or incidents which may arise from use.



877.692.2006
twbinnovations.com